



# Electrolux

## Ventilation Equipment Exhaust Hood with Fan for 6&10 GN1/1-LW

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_


SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Exhaust Hood with Fan for 6&10 GN1/1-LW  
Ventilation Equipment

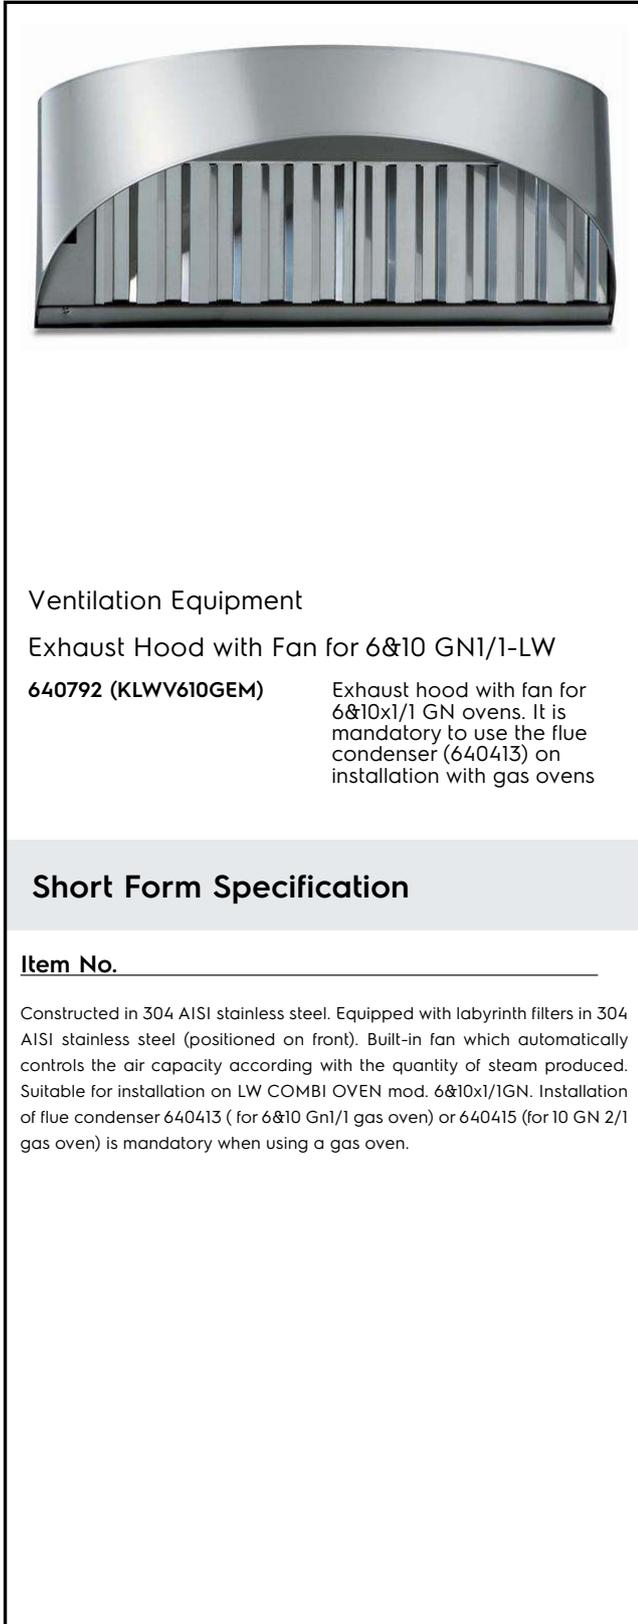

Ventilation Equipment

Exhaust Hood with Fan for 6&10 GN1/1-LW

640792 (KLWV610GEM)

Exhaust hood with fan for 6&10x1/1 GN ovens. It is mandatory to use the flue condenser (640413) on installation with gas ovens

### Short Form Specification

Item No. \_\_\_\_\_

Constructed in 304 AISI stainless steel. Equipped with labyrinth filters in 304 AISI stainless steel (positioned on front). Built-in fan which automatically controls the air capacity according with the quantity of steam produced. Suitable for installation on LW COMBI OVEN mod. 6&10x1/1GN. Installation of flue condenser 640413 ( for 6&10 Gn1/1 gas oven) or 640415 (for 10 GN 2/1 gas oven) is mandatory when using a gas oven.

### Main Features

- System guarantees correct aspiration as well as high energy saving.
- Consistent reduction of odours produced during normal cooking.
- Filtering surface protects against fire hazard.
- 304 AISI mechanical filters are dishwasher-safe thanks to the smooth surfaces.
- The easy to remove labyrinth filter provides access to the descaling pipe.
- Installation of flue condenser 640413 (for 6&10 Gn1/1 Gas Ovens) is mandatory when using a gas oven.

### Construction


- Constructed entirely in 304 AISI stainless steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Equipped with exhaust gas outlet chamber.
- Needs a direct and independent expulsion of the air to the outside.
- On model with built-in fan, a built-in humidity sensor automatically activates the ventilation upon opening of oven door and automatically reduces the ventilation as the humidity decreases, until a minimal level of humidity is reached.
- High speed fan activated by door opening detection system.
- Models without fan must be connected to a remote extractor through canalization.

### Included Accessories


- 2 of 304 Stainless steel labyrinth PNC filter (h=250 mm) 640049

APPROVAL: \_\_\_\_\_

Front




Top

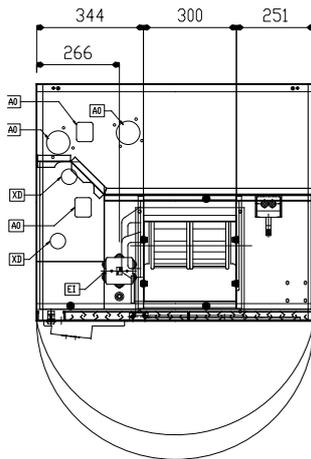

EI = Electrical connection

Side

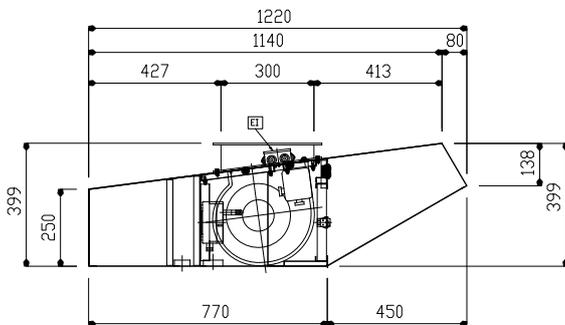

### Electric

Supply voltage:

640792 (KLWV610GEM) 220-240 V/1N ph/50/60 Hz

Total Watts:

0.42 kW

Built-in Fan Power:

420 W

### Key Information:

External dimensions, Height: 400 mm

External dimensions, Width: 895 mm

External dimensions, Depth: 1220 mm

Air capacity: 1500 mc/h

Net weight: 53 kg