



Electrolux

Modular Cooking Range Line thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

ITEM # _____

MODEL # _____

NAME # _____


SIS # _____

AIA # _____



Electrolux

Modular Cooking Range Line
thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

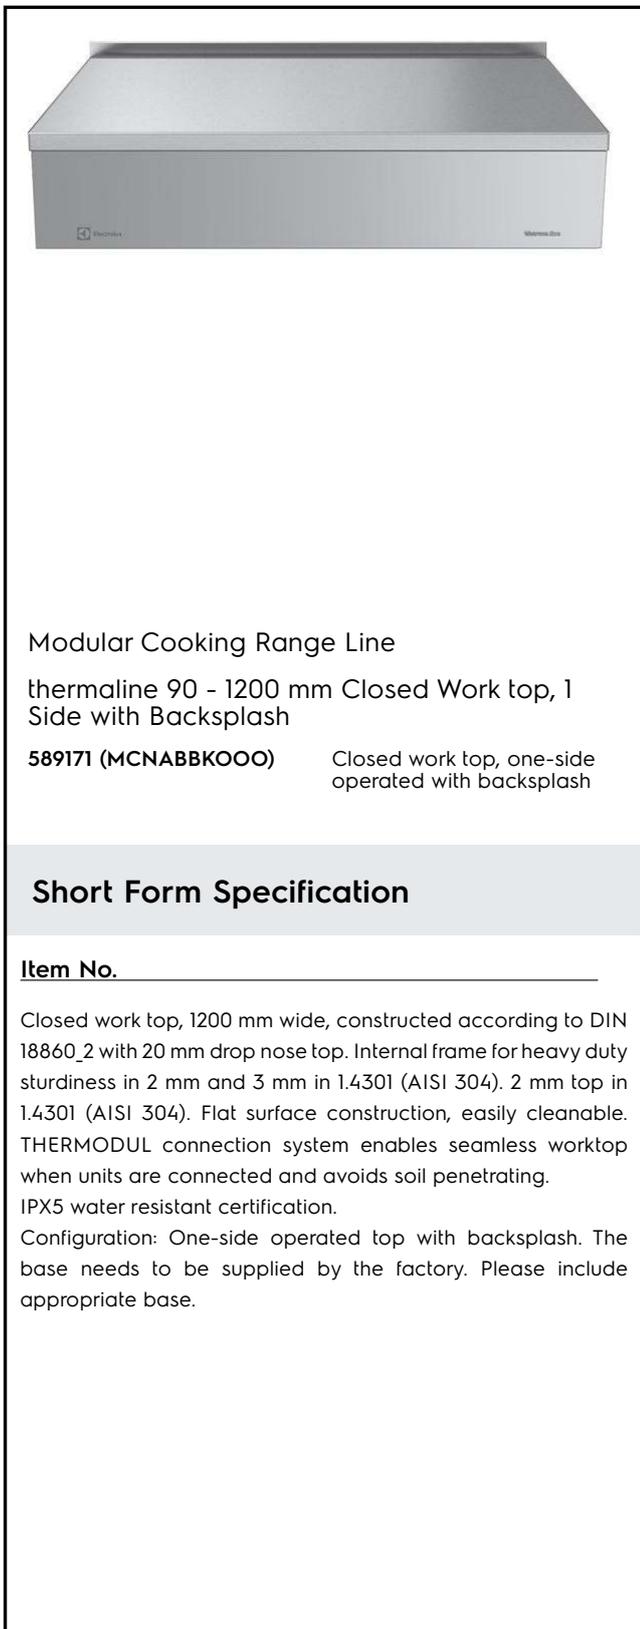

Modular Cooking Range Line

thermaline 90 - 1200 mm Closed Work top, 1
Side with Backsplash

589171 (MCNABBKOOO) Closed work top, one-side
operated with backsplash

Short Form Specification

Item No.

Closed work top, 1200 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. IPX5 water resistant certification.
Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories

- Connecting rail kit for appliances with backsplash, 900mm PNC 912499
- Portioning shelf, 1200mm width PNC 912530
- Portioning shelf, 1200mm width PNC 912560
- Folding shelf, 300x900mm PNC 912581
- Folding shelf, 400x900mm PNC 912582
- Fixed side shelf, 200x900mm PNC 912589
- Fixed side shelf, 300x900mm PNC 912590
- Fixed side shelf, 400x900mm PNC 912591
- Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) PNC 912981
- Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) PNC 912982
- Back panel, 1200x700mm, for units with backsplash PNC 913017
- Back panel, 1200x800mm, for units with backsplash PNC 913030
- Endrail kit, flush-fitting, with backsplash, left PNC 913117
- Endrail kit, flush-fitting, with backsplash, right PNC 913118
- Endrail kit (12.5mm) for thermaline 90 units with backsplash, left PNC 913208
- Endrail kit (12.5mm) for thermaline 90 units with backsplash, right PNC 913209

APPROVAL: _____



Electrolux

**Modular Cooking Range Line
thermaline 90 - 1200 mm Closed
Work top, 1 Side with Backsplash**

- U-clamping rail for back-to-back installations with backsplash
- Insert profile d=900

PNC 913226




PNC 913232



**Modular Cooking Range Line
thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash**
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2016.09.26

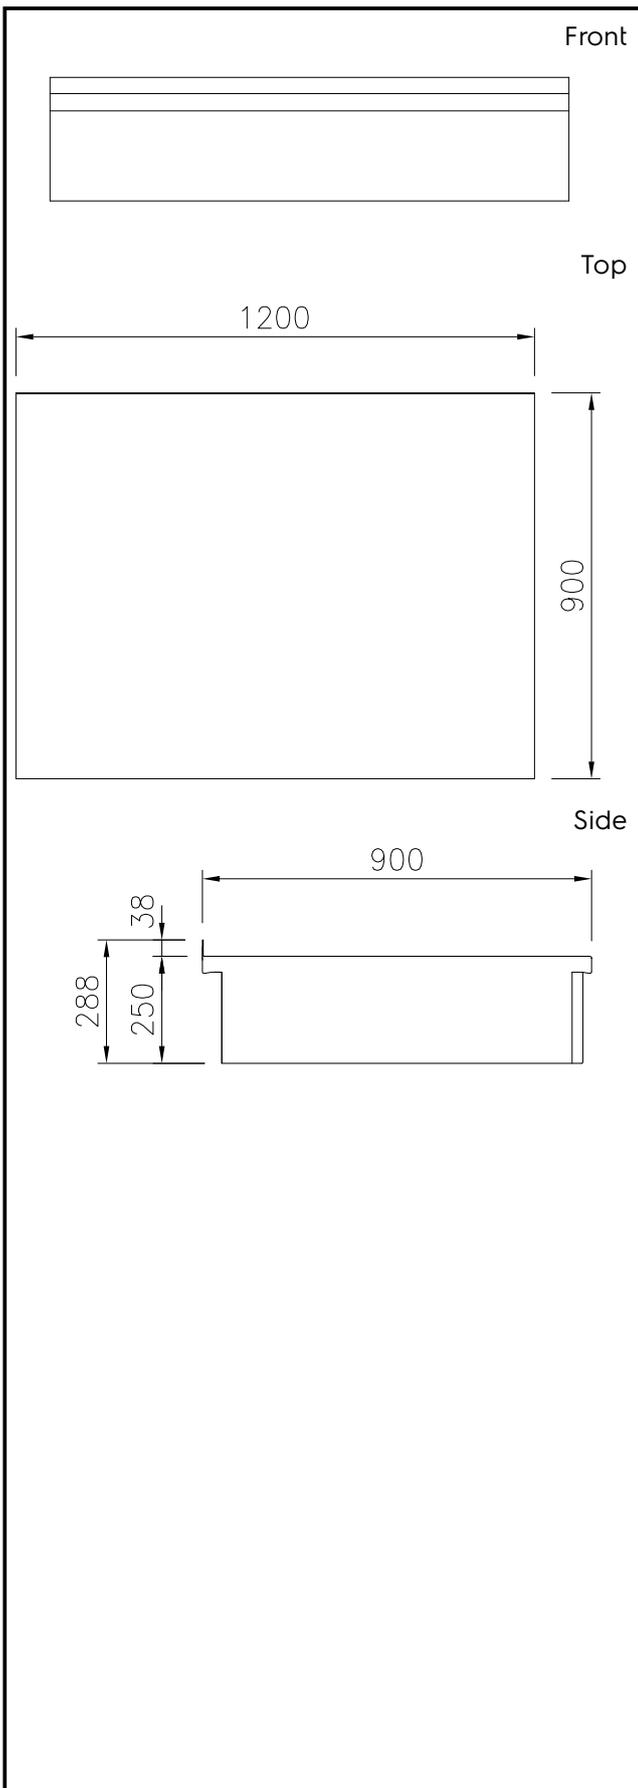
Key Information:

External dimensions, Height:	
589171 (MCNABBK000)	250 mm
External dimensions, Width:	1200 mm
External dimensions, Depth:	900 mm
Net weight:	40 kg