



Electrolux

air-o-convect Touchline air-o-convect TOUCHLINE Boilerless Combi Oven 102 (gas)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

air-o-convect TOUCHLINE Boilerless Combi Oven 102 (gas)



air-o-convect Touchline

air-o-convect TOUCHLINE Boilerless Combi Oven 102 (gas)

266763 (AOS102GKPX)

GASCONVECTION OVEN (TOUCH)10GN2/1-120V-US

Short Form Specification

Item No. _____

Unit to be Electrolux TOUCHLINE air-o-convect Boilerless Combi Oven (gas).

air-o-convect performs all of the functions of a convection oven and has a boilerless steaming capabilities to add and retain moisture for high quality, consistent cooking cycles. Cooking modes include a convection (hot air) cycle 77 °F-572 °F (25°C-300°C) with an automatic moisture control function with 11 settings from zero to high moisture, double step cooking process, automatic pre-heating, a hold function and automatic rapid cooling. All 304 stainless steel construction, seamless hygienic cooking chamber with all rounded corners. Double thermo-glazed door with open frame construction for cool outside door panel. IPX5 (NEMA 4) spray water protection certification.

Covered by Electrolux Platinum Star® Service Program, two-year parts and one-year labor warranty, installation start-up and performance checkup after one year from installation.



APPROVAL: _____

Main Features

- Dry hot convection cycle max 572°F (max 300°C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation.
 - 0 = no additional moisture (browning, au gratin, baking, pre-cooked food)
 - 1-2 = low moisture (small portions of meat and fish)
 - 3-4 = medium low moisture (large pieces of meat, reheating, roasted chicken and proving)
 - 5-6 = medium moisture (roasted vegetable and first step of roasted meat & fish)
 - 7-8 = medium-high moisture (stewed vegetables)
 - 9-10 = high moisture (poached meat and jacket potatoes)
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to replicate the same results at any time. The recipes can be grouped in up to 16 different categories to help organize the menu. Possible to save programs with up to 16-phases (steps) each.
- MultiTimer function to manage a sequence of up to 14 different cooking cycles, improving flexibility and ensuring excellent cooking results. Can be saved up to 70 MultiTimers Programs.
- air-o-flow: fresh air from the outside is directed to the bi-functional fan, becomes pre-heated and then pushed into the cooking chamber to guarantee an even cooking process.
- Exhaust valve electronically controlled to extract humidity in excess for extra crispy results.
- Fan speeds: full, half speed and pulse. Full speed active as default. Half speed ideal for delicate cooking such as baking. Pulse ideal for low weight loss and for keeping food warm at the end of the cooking cycle.
- Hold function for keeping food warm at the end of a cycle.
- Automatic and manual rapid cooling activation when going from a higher to a lower cavity temperature.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- Food Safe Control (FSC) PATENTED monitors the cooking process to comply with HACCP standards. Built-in HACCP management to record cooking procedure and to specify level of Pasteurization.
- USB connection: to download HACCP and FSC data, upload the recipes and interface setting.
- Sous-vide USB probe to ensure excellent cooking results even with vacuum-packed products (optional accessory).
- Make-it-mine feature to allow user to personalize all user main interfaces in the "Setting" mode and block editing and deleting of stored programs.
- Supplied with n.1 tray rack, 2 1/2" 65mm pitch.
- air-o-clean™ automatic and built-in self cleaning system (4 automatic) with "Green" functions to save energy, water and rinse aid.
- Electrolux Platinum Star® Service package included:
 - 2-year parts, 1-year labor warranty
 - Start-up installation check
 - Equipment check-up after 12 months from installation

Electrolux Professional, Inc.

www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401



Electrolux

air-o-convect Touchline air-o-convect TOUCHLINE Boilerless Combi Oven 102 (gas)

- ETL safety approved, complies with UL 197 and CSA 22.2 listings.
- ETL sanitation approved, complies with NSF/ANSI 2 listing.
- Gas burner is certified by Gastec for high efficiency and low emissions.

Construction

- IPX 5 spray water protection certification for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.


Included Accessories

- 5 of Single 304 stainless steel full-size grid PNC 922076 (21"x26")

Optional Accessories

- Flue condenser for hood for 10 GN 2/1 gas ovens. The flue condenser is mandatory on installations with ventilation hoods (640793 - 640794) PNC 640415
- Exhaust hood with fan for 10x2/1 GN ovens. It is mandatory to use the flue condenser (640415) on installation with gas ovens PNC 640793
- Exhaust hood with fan for 10x2/1 GN ovens. It is mandatory to use the flue condenser (640415) on installation with gas ovens PNC 640794
- Water softener with cartridge C500 for 6 1/1 and 10 1/1 ovens (low-medium steam usage - less than 2hrs per day full steam) PNC 920002
- Water softener with cartridge STEAM 1200 PNC 920003
- Automatic water softener for ovens PNC 921305
- Resin sanitizer for water softener PNC 921306
- Caster kit for base for 61, 62, 101 and 102 oven bases PNC 922003
- (4) Adjustable feet for countertop models 61, 62, 101 & 102 ovens-adjustable height: 5-15/16" - 7-7/8" (150-200mm) PNC 922012
- Chicken Racks, pair (2) (fits 8 chickens per rack) PNC 922036
- Tray support, for 62 and 102 oven bases PNC 922041
- Trolley, for roll-in rack for 62 and 102 oven PNC 922042
- Tray rack and casters for 102 oven (standard pitch) PNC 922043
- Tray rack and casters, for 102 oven (increased pitch) PNC 922045
- Slide-in rack support with handle for 62 and 102 oven PNC 922047
- Thermal blanket for 102 oven PNC 922048
- Banquet Rack, for 51 plates for 102 oven PNC 922052
- Pair of 304 stainless steel full-size grid (21 "x26") PNC 922060
- Pastry Rack 16" x 24" (400mm x 600mm) for air-o-system 102 PNC 922067
- Wheels and Hinges kit for 6 and 10 oven PNC 922073
- Kit to connect external rinse aid & detergent tank (61, 62, 101 and 102 ovens) PNC 922169
- Retractable hose reel spray unit PNC 922170

- External side spray unit PNC 922171
- Pair of 304 stainless steel full-size grids (21 " x 26") PNC 922175
- Fat Filter, for 101 and 102 oven PNC 922178
- Baguette tray, made of perforated aluminum, silicon coated, 16" x 24" (400 x 600mm) PNC 922189
- Perforated baking tray, made of perforated aluminum, 16" x 24" (400 x 600mm) PNC 922190
- Baking tray, made of aluminium 16" x 24" (400 x 600 mm) PNC 922191
- Open base with rack guides, for 62 and 102 oven PNC 922198
- Basket for detergent tank (wall mounted) for 201 and 202 oven PNC 922209
- Basket for hanging detergent tank on open bases PNC 922212
- Cupboard base and tray support, for 62 and 102 oven PNC 922234
- Flue condensor for gas ovens PNC 922235
- Hot cupboard base with humidifier and tray support for 10x2/1GN PNC 922238
- Pair of frying baskets PNC 922239
- Control Panel Filter, for 62 and 102 oven PNC 922247
- Heat Shield, for 102 oven PNC 922252
- Double-closing catch for oven door PNC 922265
- Grid for whole chicken 1/1GN (8 per grid - 1,2kg each) PNC 922266
- Electronic Board for HACCP through PC Network, for air-o-steam and air-o-convect Ovens PNC 922275
- Kit to convert from natural gas to LPG PNC 922277
- USB Probe for Sous-Vide Cooking (only for Touchline ovens) PNC 922281
- Drain Kit, T-Shape 2"diameter (50mm) PNC 922283
- Baking Tray holds (4) baguettes PNC 922288
- Egg Frying Pan fits 8 eggs PNC 922290
- Conversion Kit, from Natural Gas to LP, for 102 oven PNC 922296
- Kit flaged feet PNC 922320
- Kit Universal Skewer Rack & (6) long skewer ovens (TANDOOR) PNC 922325
- Skewers for ovens, (6) 14" short (TANDOOR) PNC 922328
- Fat collection tray for ovens (1.5") PNC 922329
- (NPT) Adaptor, 1-1/4 gas for ovens PNC 922332
- Casters for stacked ovens 62 on 62 and 62 on 102 PNC 922336
- Smoker for ovens PNC 922338
- Water filter for ovens - 4 membranes PNC 922344
- External reverse osmosis filter for ovens - 4 membranes PNC 922345
- Chimney adaptor PNC 922346
- Kit check valve PNC 922347
- Multipurpose hook PNC 922348
- Grease collection tray GN 2/1 PNC 922350

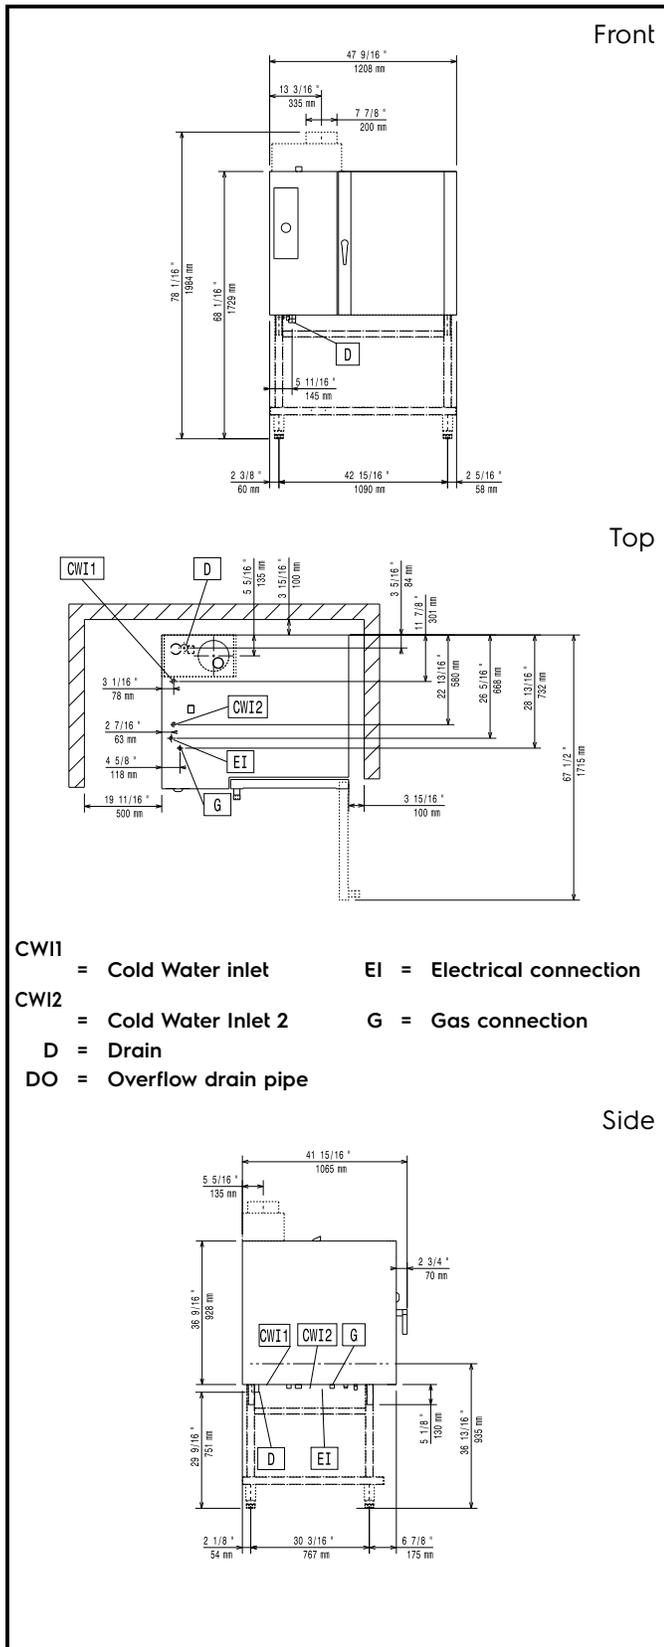

Electric

Supply voltage:	266763 (AOS102GKPX)	120 V/1 ph/60 Hz
Amps:		8.3 A
Electrical power:		1 kW
Circuit breaker required		

Gas

Gas Power:	105871 Btu/hr (31 kW)
ISO 7/1 gas connection diameter:	1/2" MNPT
Natural gas:	
Total thermal load:	105871 BTU (31 kW)
LPG:	
Total thermal load:	105871 BTU (31 kW)

Water:

Water inlet "CW" connection:	3/4"
Total hardness:	5-50 ppm
Pressure:	22-65 psi (1.5-4.5 bar)
Drain "D":	1"1/4 NPT
Electrolux recommends the use of treated water, based on testing of specific water conditions.	
Please refer to user manual for detailed water quality information.	

Installation:

Clearance:	2" rear and right hand sides.
Suggested clearance for service access:	20" left hand side.

Capacity:

Sheet pans:	10 - 18" x 26"
Steam pans:	20 - 12" x 20"
Half size sheet pans:	20 - 13" x 18"
Max load capacity:	180 lbs. (80 kg)

Key Information:

Net weight:	454 lbs (206 kg)
Shipping width:	49 13/16" (1265 mm)
Shipping depth:	44 11/16" (1135 mm)
Shipping height:	49 13/16" (1265 mm)
Shipping weight:	511 lbs (232 kg)
Shipping volume:	64.13 ft ³ (1.82 m ³)