

Fit System Bain Maire Unit 1500 mm - 4 GN (stainless steel finish)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



Fit System

Bain Maire Unit 1500 mm - 4 GN (stainless steel finish)

320108 (FSV15C4X)

Bain-marie unit, 4GN, stainless steel

Short Form Specification

Item No.

304 AISI stainless steel worktop with rounded edges. Worktop thickness 50mm. Side panels in stainless steel. Cupboard with stainless steel doors on operator side. Well with rounded corners able to accommodate GN 1/1 containers max. h=200mm (not included). Drainage tap. Thermostatically controlled temperature can be set between +20/+90 °C. Digital control panel. Electronic overheating protection. Overshelf with heating lights. Tray slide in stainless steel tubing, mounted on the customer side of the unit, folds down in order to facilitate passage of the unit through doorways. The unit is mounted on 4 wheels (150mm high).

Main Features


- Bain marie unit includes:
 - wheels
 - panelings in stainless steel or with cherry wood finish
 - doors on the operator side in stainless steel or with cherry wood finish
 - 1 tray slider in stainless steel or with cherry wood finish
 - 1 overshelf with hot lights
- Thermostatically controlled temperature can be set from +80 to +90°C, at ambient temperature, following HACCP rules.
- Endowed with high-speed heaters reducing pre-heating time (15% less than standard heaters).
- Electronic overheating protection.
- Optional tilting plinth can be installed to cover the feet as special.
- Manual water filling is standard; electrovalve to fill up with water available as special.
- Digital control panel.
- Complies with main international certification bodies and is CE marked.
- Well with drainage tap and rounded corners to facilitate cleaning operations; the well dimensions allow the storage of 4 GN 1/1 containers or various combinations of containers, all with a maximum height of 200 mm (available as accessories).

Construction


- 304 AISI stainless steel top with rounded edges.
- Unit mounted on four wheels, 150 mm in height (two with brakes), but can be mounted on 150 mm high feet (as special).
- Tray slider constructed in 304 AISI stainless steel tubing or with cherry wood finish and is installed on the customer side and it can also be folded down to facilitate passage of the units through doorways.
- Cupboard on the operator side are closed by doors (in stainless steel or with cherry wood finish).

APPROVAL: _____

Front

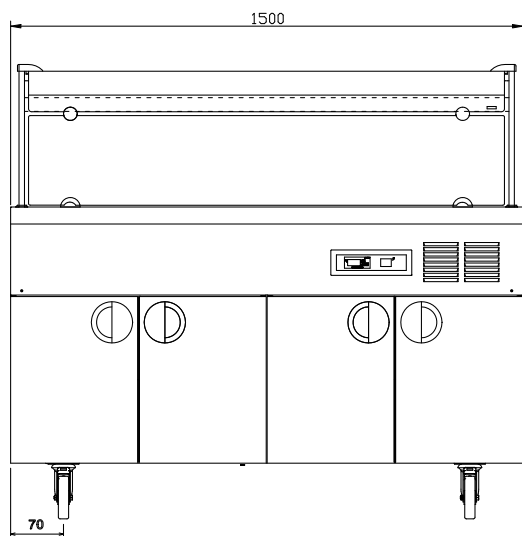


Top

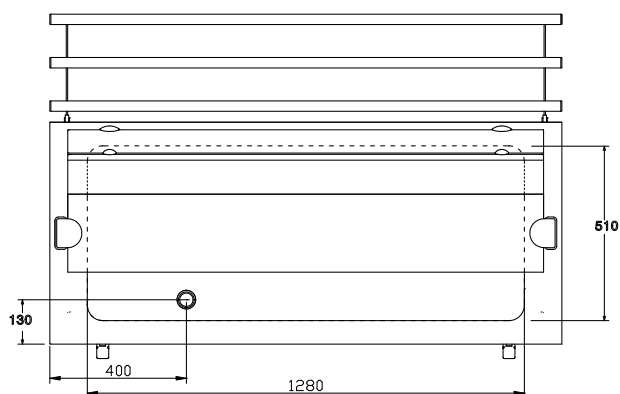

D = Drain
 EI = Electrical connection

Side

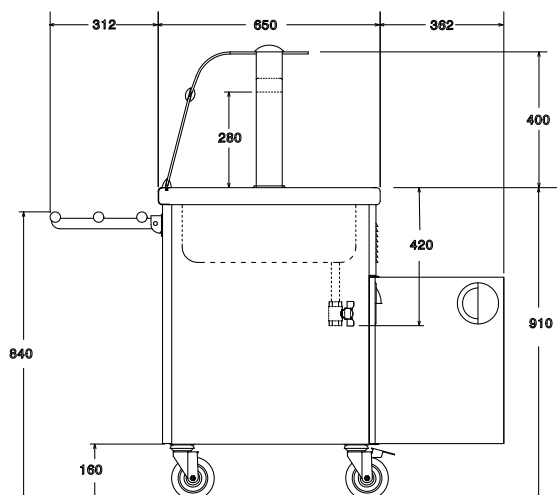

Electric

Supply voltage:

320108 (FSV15C4X) 230 V/1N ph/50 Hz

Electrical power max.:

2.62 kW

Key Information:

N° of doors:	4
Door Type:	Hinged
Number of wells:	1
External dimensions, Height:	1320 mm
External dimensions, Width:	1500 mm
External dimensions, Depth:	650 mm
Net weight:	127 kg
Well width:	1280 mm
Well depth:	510 mm
Well height:	210 mm
Well/top temperature:	80°/90°