



Electrolux

Digital Undercounter Benefit Counter Freezer - 415 lt 3 Door

ITEM # _____

MODEL # _____

NAME # _____


SIS # _____

AIA # _____



Electrolux

Digital Undercounter
Benefit Counter Freezer - 415 lt 3 Door

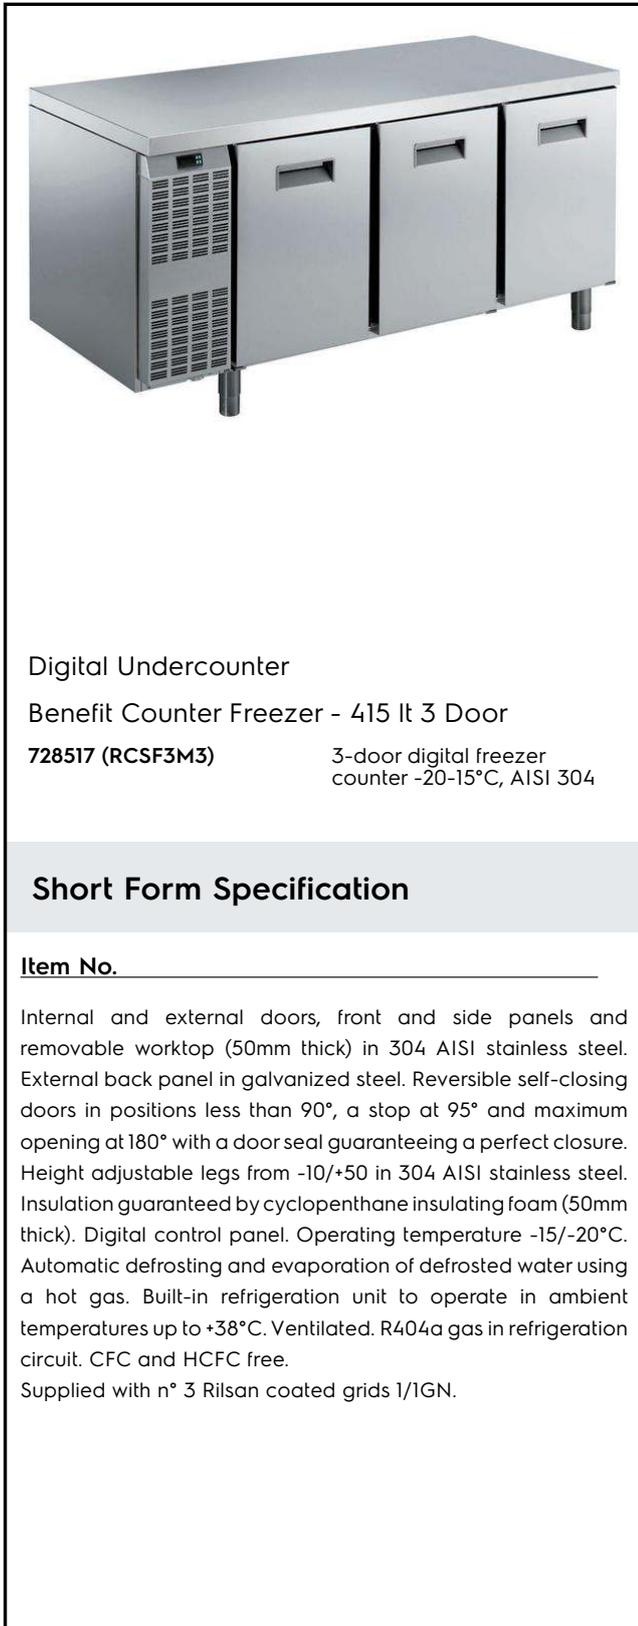

Digital Undercounter

Benefit Counter Freezer - 415 lt 3 Door

728517 (RCSF3M3)

3-door digital freezer
counter -20/-15°C, AISI 304

Short Form Specification

Item No.

Internal and external doors, front and side panels and removable worktop (50mm thick) in 304 AISI stainless steel. External back panel in galvanized steel. Reversible self-closing doors in positions less than 90°, a stop at 95° and maximum opening at 180° with a door seal guaranteeing a perfect closure. Height adjustable legs from -10/+50 in 304 AISI stainless steel. Insulation guaranteed by cyclopentane insulating foam (50mm thick). Digital control panel. Operating temperature -15/-20°C. Automatic defrosting and evaporation of defrosted water using a hot gas. Built-in refrigeration unit to operate in ambient temperatures up to +38°C. Ventilated. R404a gas in refrigeration circuit. CFC and HCFC free.

Supplied with n° 3 Rilsan coated grids 1/1GN.

Main Features

- Suitable for use in ambient temperatures of up to 38 °C.
- Adjustable temperature range from -15 °C to -20 °C to suit meat, fish and dairy storage requirements.
- Freezer compartment designed to accept GN1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Digital control panel with temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).

Construction

- Built-in compressor to suit operating conditions.
- Internal and external doors, front and side panels and removable worktop in AISI 304 Stainless steel.
- External back panel in galvanized steel.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel adjustable legs to give 150 mm clearance for ease of cleaning.
- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.


Included Accessories

- 3 of 1/1GN grey rilsan grid PNC 881435

Optional Accessories

- Lock kit for Benefit line counters PNC 880024
- Wheels kit PNC 880025
- Reversibility door kit PNC 880046
- Internal structure to support 3 grids (right and left) PNC 880047
- Kit 2 stainless steel grids GN1/1 for refrigerated counters PNC 880139
- Stainless steel internal structure to support 6 grids (right and left) PNC 880140
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- KIT 4 FEET FOR SB&CONCEPT COUNTER PNC 880334
- Kit reversible door for standard benefit counters PNC 880341
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: _____

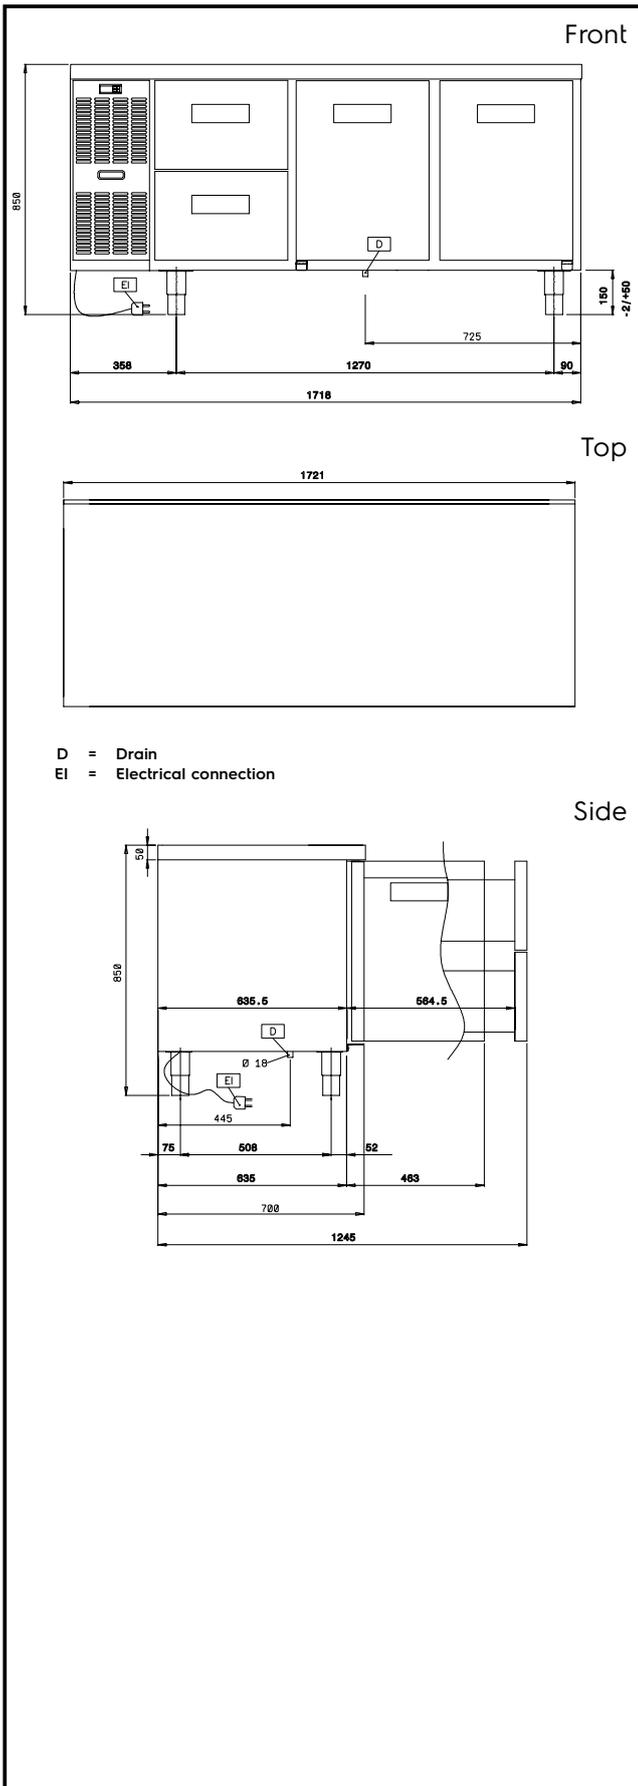

Electric

Supply voltage:

728517 (RCSF3M3) 230 V/1N ph/50 Hz

Key Information:

Gross capacity:	415 lt
Net Volume:	248 lt
Door hinges:	1 Left+2 Right
Built-in Compressor and Refrigeration Unit	
External dimensions, Height:	850 mm
External dimensions, Width:	1721 mm
External dimensions, Depth:	700 mm
Number and type of doors:	3
Depth with doors open:	1102 mm
Number and type of grids (included):	3 - GN 1/1

Refrigeration Data

Compressor power:	1 hp
Refrigerant type:	R404a
Refrigeration power:	935 W
Refrigerant weight:	210 g

Product Information (EU Regulation 2015/1094)

Energy Class:	g
Yearly energy consumption:	4067kWh/year
Climate class:	Normal duty (cl.4)
Energy Efficiency Index (EEI):	106,23