



Electrolux

air-o-steam class B Natural Gas Combi Oven 20GN 2/1

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



air-o-steam

class B Natural Gas Combi Oven 20GN 2/1

268705 (AOS202GBG2)

air-o-steam, gas, 20x2/1GN,
automatic cleaning function,
B

Short Form Specification

Item No.

Convection-steamer with dedicated steam generator guarantees a continuous supply of fresh steam at all times.

air-o-flow: fresh air is blown into the oven from the outside, after it is pre-heated it is pulled through the bi-functional fan, guaranteeing cooking evenness.

Humidity controlled through By-pass technology that guarantees the efficient use of the steam generator thus reducing water and energy consumption. Manual injection of water to add additional moisture in the cell.

air-o-clean: built-in cleaning system with four automatic pre-set cycles and one semi-automatic cleaning cycle.

Cooking cycles: steam (100 °C), low temperature steam (100 °C), overheated steam (max 130°C), hot air (max 300 °C), combi (max 250 °C), regeneration. 2-step cooking with the possibility to combine different cycles. Half power, half speed and pulse ventilation controls.

Food probe for precise cooking. Double-glass door with book-like opening maintains a cool external temperature and incorporates a drip pan to collect excess condensation avoiding wet floors. Halogen lighting in the cooking chamber. Side panels and interior in AISI 304 stainless steel.

Supplied with n.1 trolley rack 2/1GN, 63mm pitch and door shield.

Main Features

- Manual mode: traditional cooking style by manually selecting the parameters. Traditional cooking cycles available:
 - Dry, hot convection cycle (max. 300 °C): ideal for low humidity cooking.
 - Low temperature Steam cycle (max. 100 °C): ideal for sous-vide (vacuum packed) re-thermalization and delicate cooking.
 - Steam cycle (100 °C): seafood and vegetables.
 - High temperature steam (max. 130 °C).
 - Combination cycle (max. 250 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Regeneration cycle: best cooking setting for quickly heating the products to be regenerated on plate and tray (max 250°C).
- By-pass technology: controls the humidity degree of the oven atmosphere in combi and regeneration cycles. It prevents water and energy waste.
- Fan speeds: full, half speed for delicate pulse cooking such as for baking cakes and pulse ventilation for baking and low temperature cooking. The "pulse utility" is also perfect for keeping food warm at the end of the cooking cycle.
- Single sensor core temperature probe included.
- Reduced power cycle.
- air-o-flow: fresh air from the outside is directed to the bi-functional fan, becomes pre-heated and then pushed into the cooking chamber to guarantee an even cooking process.
- air-o-clean™ automatic and built-in self cleaning system (4 automatic and 1 semi-automatic cycles).
- Supplied with n.1 trolley rack 2/1GN, 63mm pitch and door shield.

Construction

- High efficiency and low emissions burners.
- IPX 5 spray water protection certification for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.

APPROVAL: _____



Electrolux

air-o-steam
class B Natural Gas Combi Oven 20GN 2/1

Included Accessories

- 1 of Trolley with tray rack for 20x2/1GN ovens and bcf, 63mm pitch PNC 922044
- 1 of Control panel filter for 20xGN2/1 ovens (already included) PNC 922249

Optional Accessories

- Water softener with cartridge STEAM 1200 PNC 920003
- Automatic water softener for ovens PNC 921305
- Resin sanitizer for water softener PNC 921306
- Pair of 1/1 GN AISI 304 grids PNC 922017
- Couple of grids for whole chicken 1/1GN (8 per grid) PNC 922036
- Trolley with tray rack for 20x2/1GN ovens and bcf, 63mm pitch PNC 922044
- Trolley with tray rack for 16x2/1GN ovens and bcf, 80mm pitch PNC 922046
- Thermal blanket for 20x2/1GN PNC 922049
- Trolley with banquet rack 92 plates for 20x2/1GN ovens and bcf, 85mm pitch PNC 922055
- Pastry trolley for 20x2/1GN ovens and bcf, 80mm pitch (16 runners). Suitable for 600x400mm pastry trays in oven PNC 922069
- Door shield for pre-heating oven, without trolley, 20 GN 2/1 PNC 922095
- Side external spray unit (needs to be mounted outside and includes support for mounting to oven) PNC 922171
- Pair of 2/1GN aisi 304 stainless steel grids PNC 922175
- 2 fat filters for 20 1/1 and 2/1 GN combi steamers (gas and electric) and convection ovens (electric) PNC 922179
- Baking tray with 5 rows (baguette), perforated aluminium with silicon coating (400x600x38) PNC 922189
- Baking tray with 4 edges, perforated aluminium (400x600x20) PNC 922190
- Baking tray with 4 edges, aluminium (400x600x20) PNC 922191
- Flue condenser for gas combi steamers and convection ovens PNC 922235
- 2 frying baskets for ovens PNC 922239
- Heat shield for 20x2/1GN PNC 922242
- Retractable spray unit for 20GN1/1&2/1 ovens PNC 922263
- Grid for whole chicken 1/1GN (8 per grid - 1,2kg each) PNC 922266
- Kit integrated HACCP for ovens PNC 922275
- Kit to convert from natural gas to LPG PNC 922277
- Adjustable wheels for 20x1/1 and 20x2/1GN ovens PNC 922280
- Baking tray for baguette 1/1GN PNC 922288
- Egg fryer for 8 eggs 1/1GN PNC 922290


- Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens PNC 922325
- Universal skewer rack PNC 922326
- 6 short skewers PNC 922328
- Grease collection tray 40 mm PNC 922329
- Smoker for lengthwise and crosswise ovens - 4 kinds of smoker wood chips are available on request PNC 922338
- Water nanofilter for ovens (10x2/1GN, 20x1/1GN and 20x2/1GN) PNC 922344
- External reverse osmosis filter for ovens (10x2/1GN, 20x1/1GN and 20x2/1GN) PNC 922345
- Chimney adaptor PNC 922346
- Kit check valve PNC 922347
- Multipurpose hook PNC 922348
- Flat baking tray with 2 edges, GN 1/1 PNC 925006




Electrolux

air-o-steam class B Natural Gas Combi Oven 20GN 2/1

Front

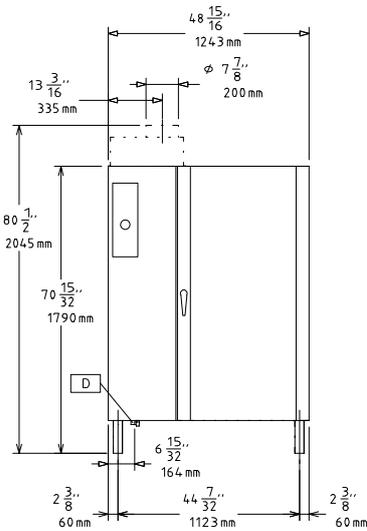


Top

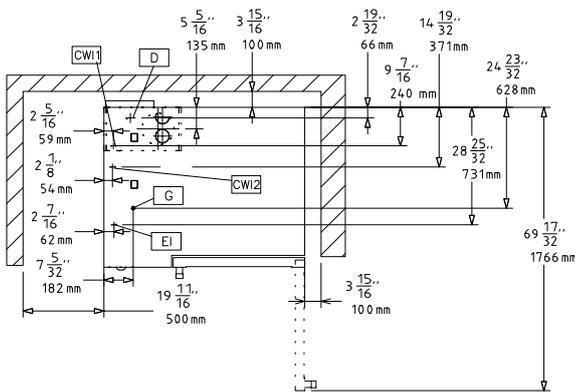

CWI1 = Cold Water inlet 1
 CWI2 = Cold Water Inlet 2
 D = Drain
 EI = Electrical connection

G = Gas connection

Side

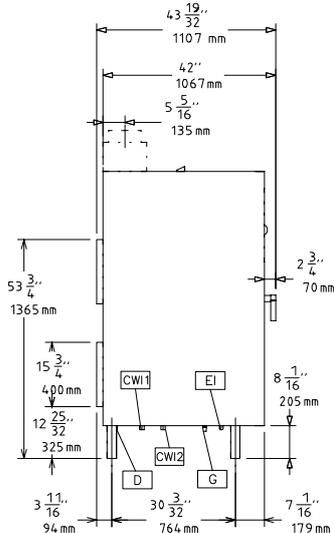

Electric

Supply voltage:
 268705 (AOS202GBG2) 230 V/1N ph/50/60 Hz

Electrical power: 2 kW

Circuit breaker required

Gas

ISO 7/1 gas connection diameter: 1" MNPT

Natural gas:

Pressure: 7" w.c. (17.4 mbar)

Steam generator: 55 kW

Heating elements: 187495 BTU (55 kW)

Total thermal load: 323855 BTU (95 kW)

Water:

Water inlet "CW" connection: 3/4"

Total hardness: 5-50 ppm

Pressure, bar min/max: 1.5-4.5 bar

Drain "D": 2"

Electrolux recommends the use of treated water, based on testing of specific water conditions. Please refer to user manual for detailed water quality information.

Installation:

Clearance: Clearance: 5 cm rear and right hand sides.

Suggested clearance for service access: 50 cm left hand side.

Capacity:

GN: 20 - 2/1 Gastronorm

GN: 40 - 1/1 containers

Max load capacity: 200 kg

Key Information:

External dimensions, Height: 1795 mm

External dimensions, Width: 1243 mm

External dimensions, Depth: 1107 mm

Net weight: 414 kg

Shipping weight: 444 kg

Shipping volume: 3.1 m³



air-o-steam
 class B Natural Gas Combi Oven 20GN 2/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.