

# Washer extractors

## W4350X

### Features and benefits

- **Clarus Control<sup>®</sup> with:**
  - Fully programmable microprocessor
  - All relevant wash parameters can be programmed
  - Programming from key pad or downloading via memory card
- Large door opening for easy loading/unloading
- Super Balance, software ensure a quick distribution/extraction cycle with low noise/vibration level
- Frequency controlled motor
- Prepared for manual or automatic detergent supply
- Stainless steel in all vital parts for high degree of rust protection
- Stainless steel front panels and powder painted side panels
- Non-heated or direct steam heating
- Electrical heating

### Main options

- Stainless steel panels
- Coin-meter






Images shown are a representation of the product only and variations may occur.

Main specifications				W4350X	
Rated capacity, filling factor 1:10		kg/lb		35/77	
Drum, volume		litre		350	
	diameter	∅ mm		920	
Extraction max		rpm		650	
G-factor				220	
Heating alternatives, 230/400V	electricity	kW		24.0	
	steam			x	
	non-heated			x	
<b>Consumption data "Normal 60°C" 1:10*</b>				El	Steam
Total time		min		49	**
Water consumption (cold/hot)		litre		313/62	375/-
Energy consumption (motor/heating)		kWh		0.5/2.4	0.5/-
Steam consumption		kg		-	9.5
* Water temperature 15°C cold water and 65°C hot water.					
** Depending on steam pressure.					

Electrical connections					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-230V 3 -	50/60	24.0	25.1	80
	220-240V 3 -	50/60	24.0	25.1	63
	380-480V 3 -	50/60	24.0	25.1	50
Steam or Non heated	220-480V 1/3 -	50/60	-	1.7	10

Water and steam connection		W4350X
Water valves	DN	20
Water pressure	kPa	200-600
Capacity at 300 kPa	l/min	60
Drain valve	∅ mm	75
Steam valve	DN	15
Steam pressure	kPa	300-600
Floor requirements		
Frequency of the dynamic force	Hz	10.8
Floor load at max extraction	kN	6.9 ± 10.7
Sound levels		
Sound pressure level*		
Wash	dB(A)	<70
Extraction	dB(A)	82
Heat emission		
% of installed power, max		5
Shipping data		
Weight	net, kg	560
Dimensions in mm		
A	Width	1085
B	Depth	1105
C	Height	1570
D		530
E		120
F		525
G		55
H		1465
I		185
K		1445
L		315
M		395
N		120
O		190

\* A-weighted emission sound pressure level at workingstations.

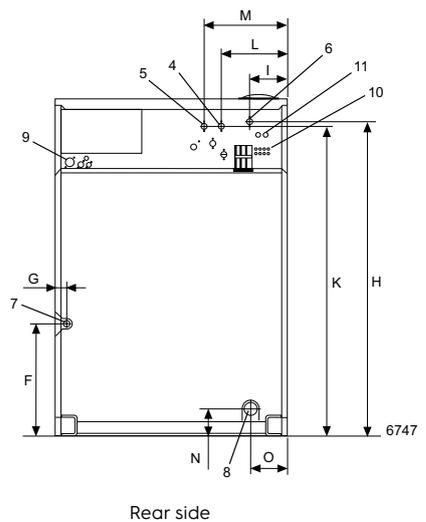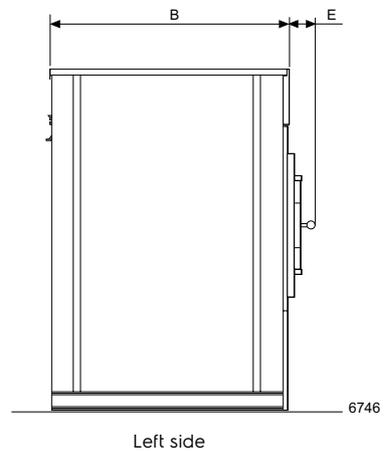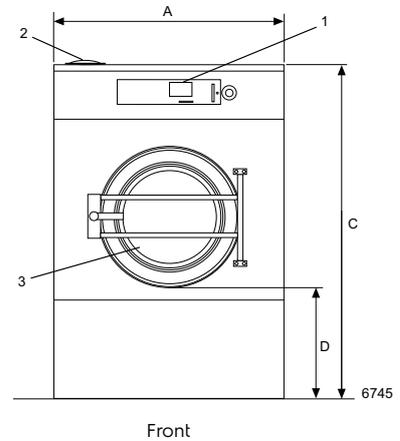

- 1 Operating panel
- 2 Detergent box
- 3 Door opening ∅ 535 mm
- 4 Cold water
- 5 Hot water
- 6 Cold or hot water
- 7 Steam connection
- 8 Drain
- 9 Electrical connection
- 10 Liquid detergent supply
- 11 Water reuse