



Electrolux

Ventilation Equipment 304 S_S Wall Hood+Filter+Lamps 3600x1100mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



Ventilation Equipment

304 S_S Wall Hood+Filter+Lamps 3600x1100mm

641255 (STPF1136)

304 s/s wall hood with filters and lamps

Short Form Specification

Item No. _____

Compensating-Flow Exhaust System (air inlet from outdoors). Constructed in 304 AISI stainless steel. Equipped with labyrinth filters in 304 AISI stainless steel, blind panels in 304 AISI stainless steel, fluorescent lights, grease collecting trough in all around and condensate collecting tray.

Main Features

- External panels with upturned edges to avoid injuries.
- Low noise level.
- Heating and air conditioning costs reduced thanks to the compensated air flow.


Construction

- Outlet holes are sized in order to minimize drops in pressure.
- Labyrinth filters guarantee constant filtration to avoid clogging and to protect against fire.
- Perimetral gutter with drain hole to transfer grease into a 304 AISI container.
- 304 AISI stainless steel labyrinth filters easily removable for cleaning.
- Built-in lighting with protective screen.
- Optional accessory: air intake Plenum, which is insulated to avoid condensation.
- Rear exhaust with filters and front air intake through a narrow slot sized to obtain the correct induction effect.
- Perforated panel inside the intake circuit guarantees a perfect and uniform air distribution.
- Completely insulated intake area to avoid external condensation.
- Two separate air circuits (extraction and intake) to reduce the quantity of treated air released in the environment.
- Entirely constructed in 304 AISI stainless steel.

Optional Accessories

- Extraction plenum for 3600mm hood PNC 640141
- Galvanized air inlet plenum for 3600 mm hood PNC 640377

APPROVAL: _____

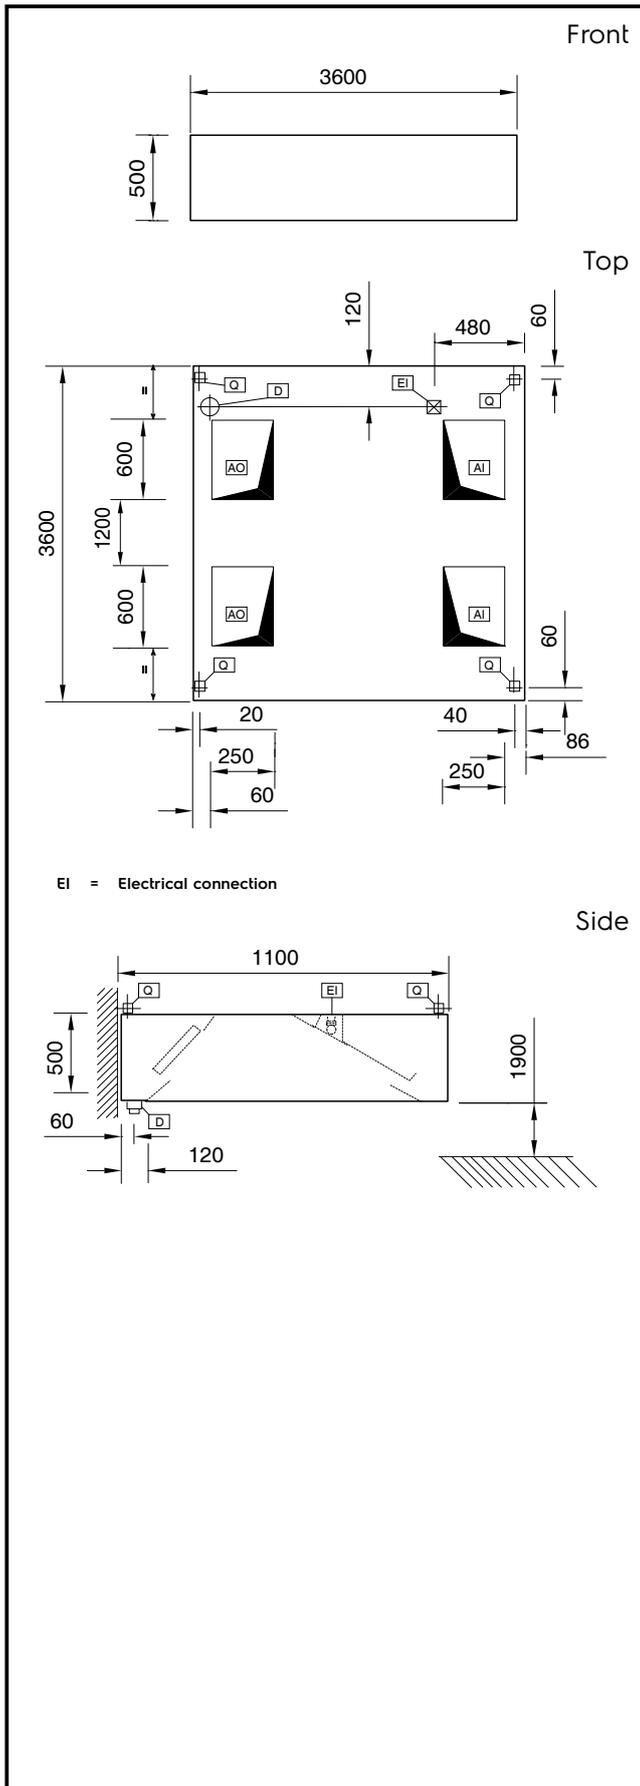

Electric

Supply voltage:	
641255 (STPF1136)	220 V/1N ph/50/60 Hz
Total Watts:	0.32 kW

Key Information:

External dimensions, Height:	500 mm
External dimensions, Width:	3600 mm
External dimensions, Depth:	1100 mm
Air capacity:	4400 mc/h
Net weight:	219 kg