



# Electrolux

## Digital Cabinets 400lt Line Refrigerator 1 Door - Stainless Steel - 60Hz

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

400lt Line Refrigerator 1 Door - Stainless Steel - 60Hz  
Digital Cabinets



Digital Cabinets

400lt Line Refrigerator 1 Door - Stainless Steel - 60Hz

**730101 (R04PVF4M)**

1-door refrigerator, 400lt,  
0+10°C, stainless steel, 60Hz,  
marine

### Short Form Specification

Item No.

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost and evaporation of defrost water; digital control and temperature display. For ambient temperatures up to 43 °C. HCFC, CFC and HFC free insulation and R134a refrigerant gas.

Supplied with n. 4 grids mm600x400, PE coated.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- Suitable for use in ambient temperatures of up to 43 °C.
- Model equipped with roll-bond plate that has a plate installed in the internal backside of the unit equipped with a special thermostat to avoid ice formation.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

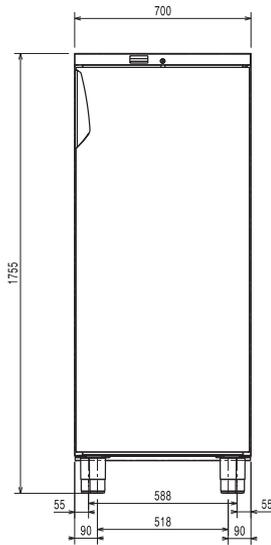

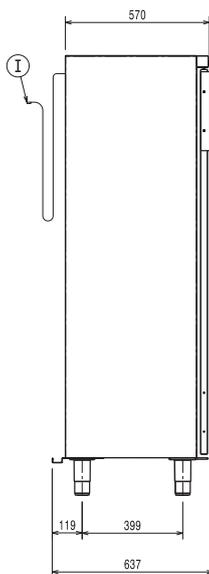
### Included Accessories

- 2 of Pair of grids for 400lt refrigerator, white PNC 880292

### Optional Accessories

- Pair of grids for 400lt refrigerator, PNC white 880292
- 2 wheels for HD refrigerated counter and 400, 600 & 1300lt benefit refrigerated cabinets PNC 880539
- Pvc container with false bottom for 400lt PNC 881072
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: \_\_\_\_\_

**Front**

**Top**

**Side**


EI = Electrical connection  
RI = Refrigerant Inlet  
RO = Refrigerant Outlet

### Electric

Supply voltage:

730101 (R04PVF4M)

220-230 V/1N ph/60 Hz

Electrical power:

0.22 kW

### Key Information:

Door hinges:	Right Side
External dimensions, Height:	1755 mm
External dimensions, Width:	700 mm
External dimensions, Depth with Doors Open:	1310 mm
Gross capacity:	400 lt
Noise level:	55 dBA
Number and type of grids (included):	4 - 600x400
Type of external material:	Stainless Steel
External door material:	Stainless Steel

### Refrigeration Data

Control type:	Digital
Refrigerant type:	R134a
Refrigeration power at evaporation temperature:	-12 °C
Refrigerant weight:	240 g
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
Cooling unit:	Built-In
Defrost type:	Automatic (air)