

Speed Queen®

MULTI-HOUSING

Push-To-Start
Commercial Washers & Dryers



BUILT FOR **RELIABLE** PERFORMANCE.


Our push-to-start control line features top load washers that offer the flexibility of selecting hot, warm and cold wash temperatures and two-speed wash and spin actions. Our single load and stack dryers have four heat/cycle options and time start activation. These units are ideal for military, colleges, restaurants, beauty salons and other special business applications.

PUSH-TO-START controls provide easy push-to-start activation indicated by "In Use" light.



TOP LOAD WASHER

The Speed Queen push-to-start activated top load washer gives building owners and property managers unparalleled ability to reduce water and energy costs. The top load washer has met every design standard to be Department of Energy compliant to commercial washer standards for energy and water savings.

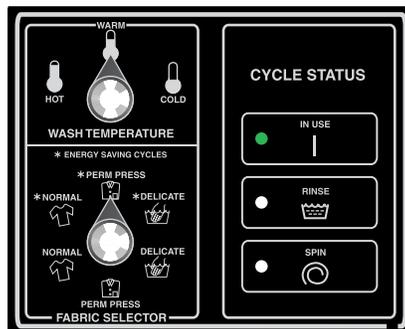

FEATURES

HIGH SPEED EXTRACT

710 RPM final spin to maximize moisture removal from clothes.

AUTOMATIC BALANCING SUSPENSION SYSTEM

ABS provides the industry's best out-of-balance handling, completing wash cycles without interruption.

DURABLE STAINLESS STEEL AND PORCELAIN ENAMEL WASH TUB


FOUR-VANE POLYPROPYLENE AGITATOR

210° agitation stroke delivers superior washability for all load sizes.



SINGLE LOAD DRYER

Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. The dry cycle is efficient and fast with settings from 0 to 60 minutes available. Customers have the flexibility to choose from four heat/cycle selections.

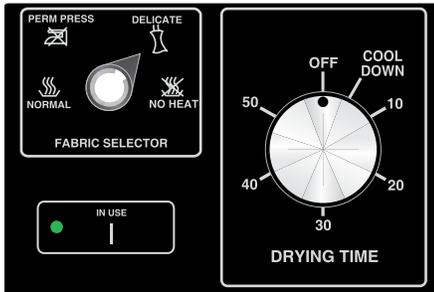

FEATURES

SUPERIOR DRYING CONVENIENCE

Industry's largest door opening
2.06 sq. ft. (1914 cm²).

EFFICIENT DRYER HEATING

With 25,000 BTU (gas models) and up to 5,350 Watts (electric models). Speed Queen dryers offer some of the fastest drying times in the industry.

UPFRONT LINT FILTER

Easy to clean and secured.

REVERSIBLE DOOR

For installation flexibility.

STACK DRYER

The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. ADA Compliant (bottom dryer only).

FEATURES

GRAPHIC ARROWS

On control indicate upper and lower pockets.

100% SERVICEABLE FROM THE FRONT



PUSH-TO-START CONTROL COMMERCIAL WASHER & DRYER SPECIFICATIONS

	Top Load Washer	Single Load Dryer		Stack Dryer	
	SWNMN2PP112TW01 SWNMN2SP112TW01	Electric 208: Electric 240: Gas:	SDE807WF1500 SDE807WF SDG809WF	Electric 208: Electric 240: Gas:	SSEMNAGS151TW01 SSEMNAGS171TW01 SSGMNAGS111TW01
Basket/Cylinder Volume - cu.ft. (liters)	3.26 (92.3)	70 (198)		70 (198) ea pocket	
Width - in (mm)	25 5/8 (651)	26 7/8 (683)		26 7/8 (683)	
Depth - in (mm)	28 (711)	28 (711)		28 (711)	
Height* - in (mm)	43 (1092)	43 (1092)		78 3/16 (1986)	
Weight - lb (kg)	190 (86)	Electric: Gas:	135 (61) 140 (64)	Electric: Gas:	265 (120) 275 (125)
Shipping Weight - lb (kg)	210 (95)	Electric: Gas:	145 (66) 150 (68)	Electric: Gas:	280 (127) 290 (132)
Cycle Time - minutes (default)	31	45		45 ea	
Motor - HP (kW)	1/2 HP (2 speed)	1/3 HP, 5.5 amps		1/3 HP, 5.5 amps	
Water Consumption - gal (Liter)	27.3 (103.2)	N/A		N/A	
Water Factor - gal/ft ³ (Liters/Liter/cycle)	8.4 (1.12)	N/A		N/A	
Modified Energy Factor - ft ³ /kWh/cycle (Liters/kWh/cycle)	1.65 (46.7)	N/A		N/A	
Average Hot Water Per Cycle - gal (Liter)	2.3 (8.8)	N/A		N/A	
Water Pressure - psi (bar)	Pressure fill 20 to 120 (1.4/8.3)	N/A		N/A	
Spin Speed - RPM	474, 710	N/A		N/A	
Cycle/Temperature	Normal Perm Press Delicate	Normal Perm Press Delicate No Heat		Normal Perm Press Delicate No Heat	
Electrical Specifications and Circuit Requirements	120/60/1-15 amp	Electric: Gas:	208/60/1-30 amp 240/60/1-30 amp* 120-60/1-15 amp	Electric: 2 ea Gas: 2 ea	208/60/1-30 amp 240/60/1-30 amp* 120-60/1-15 amp
Motor	60 Hz	60 Hz		60 Hz	
Btu per Hour (kcal)	N/A	25,000 (6300)		25,000 (6300)	
Heating Element	N/A	4750W, 208V 5350W, 240V		4750W, 208V (2 ea) 5350W, 240V (2 ea)	
Type of Gas (Gas models only)	N/A	Factory-equipped natural/mixed gas convertible to LP gas**		Factory-equipped natural/mixed gas convertible to LP gas**	
Utility Connections - in (mm)	N/A	Gas: 3/8" NPT (9.5)		Gas: 3/8" NPT (9.5)	
Air Outlet Diameter - in (mm)	N/A	4" (102)		4" (102)	
Exhaust Airflow - cfm (liters/sec)†	N/A	220 (105)		220 (105)	
Maximum Exhaust Static Back Pressure	N/A	0.6" W.C.		0.6" W.C.	
Agency Approval	cULus	Electric: Gas:	cULus cCSAus	Electric: Gas:	cULus cCSAus
Activation	Push-to-Start	Push-to-Start		Push-to-Start	
Top and Lid Finish	Porcelain	Porcelain		N/A	
Colors	White	White		White	
Door Type	N/A	Solid		Solid	

NOTE: Each stack dryer pocket requires its own separate power cord.

* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

** IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the U.S.A.



Speed Queen®