

Washer extractor

W575S

Features and benefits

- **Compass Pro[®] microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Quick selection and option buttons for the most frequently used wash programs and options
- **AWS – Automatic Savings:**
 - The machine weighs the linen and adjusts the amount of water and energy according to the load. This leads to considerable savings in case the machine is not fully loaded. (Available on general programs)
- Extremely low water and energy consumption – see table below
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- SuperBalance guarantees the correct extraction force



Images shown are a representation of the product only and variations may occur.

Main options

- Automatic liquid detergent supply (optional I/O board)
- Stainless steel front panel
- Connection to booking- /payment- system or coin meter
- Drain pump

Main specifications				W575S			
Max. capacity	filling factor 1:9	kg/lb		8/18			
Drum, volume		litre/ft ³		75/2.6			
	diameter	ø mm/inch		520 / 20 1/2			
Extraction		rpm		830			
G-factor				200			
Standard heating alternatives	electricity	kW		5.4 / 7.5			
Low energy heating alternatives	electricity	kW		2.0 / 3.0			
	steam			x			
	non-heated			x			
Modified energy factor ****				2.03			
Water factor****				6.1			
Consumption data 6S03/6L33				EI		Steam***	
"Warm" *				Full load, 8 kg / 17.6 lb	Half load**, 4 kg / 8.8 lb	Full load, 8 kg / 17.6 lb	Half load**, 4 kg / 8.8 lb
Total time		min		49	45	49	45
Water consumption (cold+hot)		litre/gallon		53/14 + 13/3	28/7 + 7/2	66/17 + 0/0	35/9 + 0/0
Energy consumption (motor/heating/hot water)		kWh		0.1/0.4/0.8	0.1/0.25/0.45	0.1/-	0.1/-
Steam consumption		kg/lbs		-	-	1.8/4.0	1.0/2.2
Residual moisture		%		58	66	58	66

* Water temperature 59°F cold water and 149°F hot water.

** Programs with AWS.

*** Depending on steam pressure.

**** The figures are based on theoretical calculations and not lab tests, with AWS program.


Electrical connections					
Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended ITCB A
	208-240V 1 -	60	2.0/3.0	2.1/3.1	30/50
	208-240V 3 -	60	5.4/7.5	5.5/7.6	20/25
	208-240V 3 -	60	2.0/3.0	2.1/3.1	15
	440/480V 3 -	60	5.4/7.5	5.5/7.6	15
Steam or Non heated	120/440/480V -	60	-	0.6	15
	208-240V -	60	-	0.5	15

Water and steam connection		W575S
Water valves	DN/inch	20 / 3/4
Water pressure	psi	30-90
Capacity at 300 kPa	l/min	20
Drain valve	ø mm/inch	75 / 3
Draining capacity	l/min	170
Steam valve	DN/inch	15 / 1/2
Steam pressure	psi	40-90
Liquid detergent supplies		5
Floor requirements		
Frequency of the dynamic force	Hz	13.8
Floor load at max extraction	kN	1.6 ± 2.4
Sound levels		
Sound pressure level*		
Wash	dB(A)	<70
Extraction	dB(A)	75
Heat emission		
% of installed power, max		5
Shipping data**		
Weight	net, kg/lbs	116 / 256
Shipping volume	m ³ /ft ³	0.75 / 26
Accessories		
Steel base		x
Hose kits for water or steam		x
Fluff collector		x
Dimensions in mm/inch		
A Width		660 / 26
B Depth		681 / 26 13/16
C Height		1131 / 44 1/2
D		409 / 16 1/8
E		1099 / 43 1/4
F		835 / 32 7/8
G		80 / 3 1/8
H		1034 / 40 11/16
I		217 / 8 9/16
J		124 / 4 7/8
K		1014 / 39 15/16
L		914 / 36
M		278 / 10 15/16
N		101 / 4
O		199 / 7 13/16
1 Operating panel	6 Re-used water	
2 Door opening ø 310 mm / 12 3/16 inch	7 Drain	
3 Detergent box	8 Liquid detergent supply	
4 Cold water	9 Electrical connection	
5 Hot water	10 Steam connection	


Front and side panels in light grey and blue (RAL 260 70 05, 250 60 30)

* A-weighted emission sound pressure level at workingstations.


** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

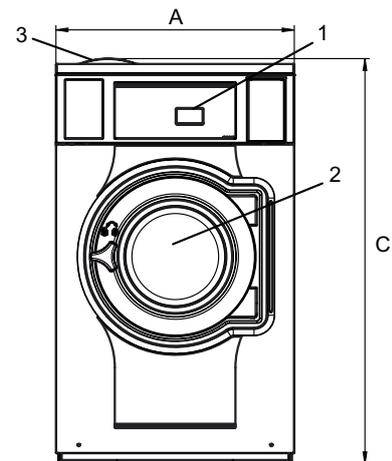

Front

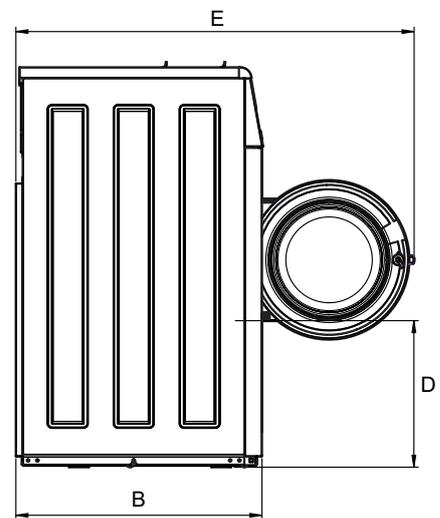

Side view

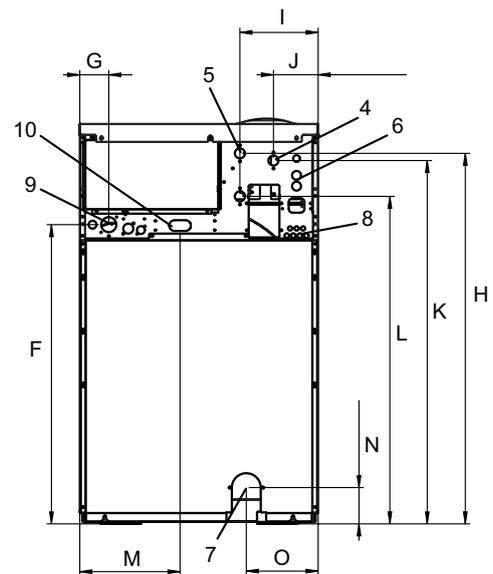

Rear