

Speed Queen® Multi-Housing

Push-to-Start Commercial Single Load Dryer

Rear Control



BUILT FOR RELIABLE PERFORMANCE

- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- End-of-cycle signal
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder
- Extra-large capacity

PUSH-TO-START CONTROL

- Reliable heavy-duty operation
- Four dryer heat cycle options
- Easy to use controls offer basic features for optimal laundry room operation




PUSH-TO-START SINGLE LOAD DRYER SPECIFICATIONS

MODELS AND ACTIVATION		SDE807WF1500 SDE807WF SDG809WF
Activation	Coin Slide	
Appearance		
Color	White	
Control Panel Selection	Rear	
Technical Info		
Galvanized Cylinder Volume - cu. ft. (liters)	7.0 (198)	
Cycle Temperature - Normal, Perm Press, Delicate, No Heat		
Motor - HP	1/3 HP	
Weight - lb (kg)	Elec	135 (61)
	Gas	140 (64)
Shipping Weight - lb (kg)	Elec	145 (66)
	Gas	150 (68)
Electrical Requirements	Elec	120/208/60/1 120/240/60/1 30 amp*
	Gas	120/60/1 15 amp
Overall Dimensions - WxDxH in (mm): 26 7/8 (683) x 28 (711) x 43 (1092)		
Type Of Gas (Gas Models Only) Factory-Equipped Natural/Mixed Gas**		
Air Outlet Diameter - in (mm)	4 (102)	
Efficient Dryer Heating	Elec	4750W, 208V 5350W, 240V
	Gas	25,000 Btu
Performance/Features		
StrongBox Security™ System		
Agency Approval	Elec	cULus
	Gas	cCSAus

* Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit.
 ** Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

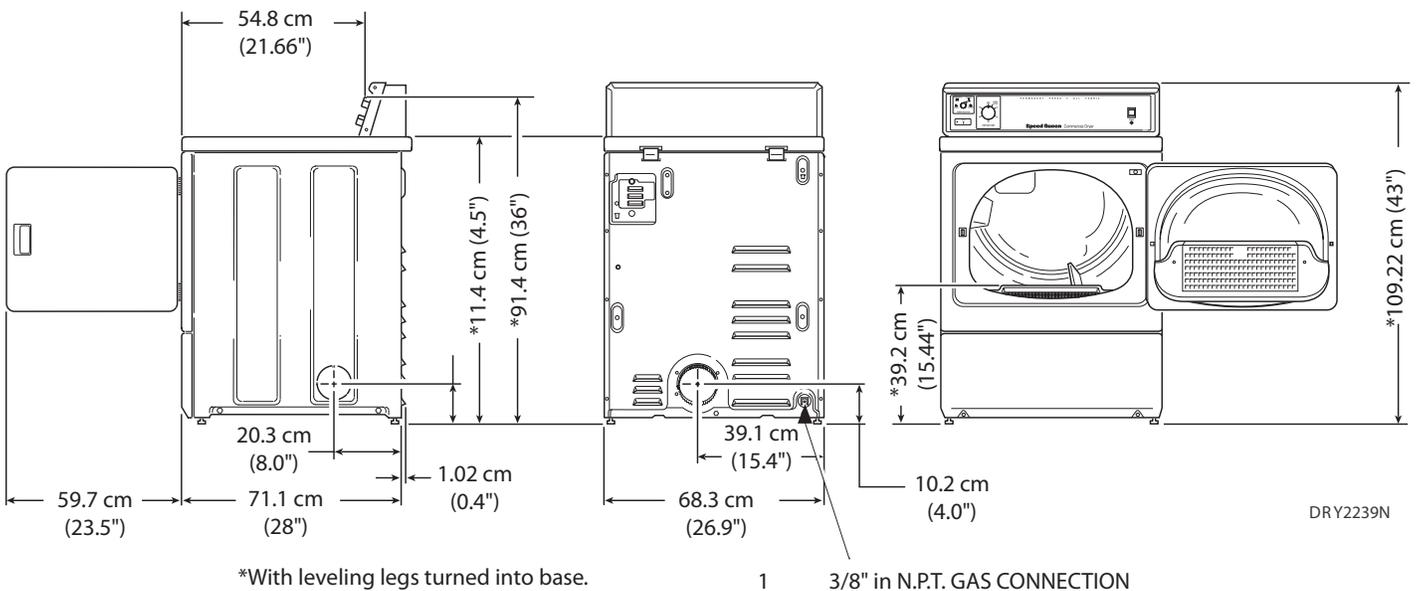

DRY2239N

