



# Electrolux

## Digital Cabinets 400lt Line Freezer, 1 Door (White) 60Hz

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux



Digital Cabinets

400lt Line Freezer, 1 Door (White) 60Hz

**730105 (R04FSFW6)**

1-door freezer 400lt, -15-24°  
C, prepainted white

### Short Form Specification

Item No. \_\_\_\_\_

Exterior in white painted steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R404a refrigerant gas. With 2 front feet and 2 back wheels. Supplied with n. 4 evaporating grids.

### Main Features

- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.
- Model requires only 1 phase 220V-60Hz supply and can be plugged straight into an existing power socket.

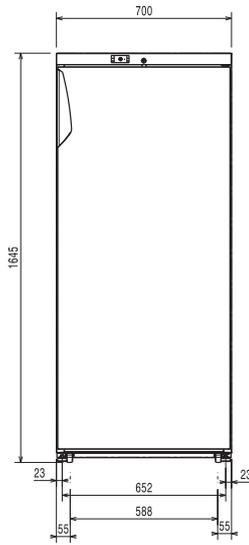
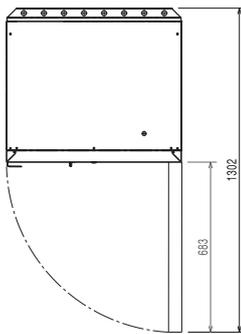
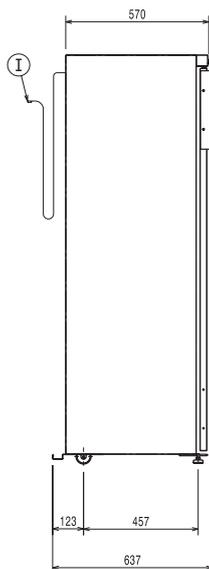
### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

### Optional Accessories

- Pvc container with false bottom for 400lt  PNC 881072
- Printer for HACCP basic version (for cabinets and counters with digital control)  PNC 881457

APPROVAL: \_\_\_\_\_

**Front**

**Top**

**Side**


EI = Electrical connection  
RI = Refrigerant Inlet  
RO = Refrigerant Outlet

**Electric**

Supply voltage:  
730105 (R04FSFW6) 220-230 V/1N ph/60 Hz  
Electrical power: 0.8 kW

**Key Information:**

Door hinges: Right Side  
External dimensions, Height: 1645 mm  
External dimensions, Width: 700 mm  
External dimensions, Depth with Doors Open: 1310 mm  
Gross capacity: 400 lt  
Noise level: 56 dBA  
Number and type of grids (included): - ;600x400  
Type of external material: Prepainted Steel  
External door material: Prepainted Steel

**Refrigeration Data**

Control type: Digital  
Compressor power: 1/2 hp  
Refrigerant type: R404a  
Refrigeration power: 780 W  
Refrigeration power at evaporation temperature: -29 °C  
Refrigerant weight: 240 g  
Operating temperature min.: -24 °C  
Operating temperature max.: -15 °C  
Operating mode: Static  
Cooling unit: Built-In  
Defrost type: Manual