Electrolux

# Modular Cooking Range Line thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

ITEM #

MODEL #

NAME #

SIS #

AIA #

Modular Cooking Range Line

thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

**589171 (MCNABBKOOO)** Closed work top, one-side operated with backsplash

## Short Form Specification

**Item No.**

Closed work top, 1200 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304). 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.
IPX5 water resistant certification.
Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

**APPROVAL:**

## Main Features

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

## Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 2 mm and 3 mm in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

## Optional Accessories

| | |
|---|---|
| • Connecting rail kit for appliances with backsplash, 900mm | PNC 912499 ❑ |
| • Portioning shelf, 1200mm width | PNC 912530 ❑ |
| • Portioning shelf, 1200mm width | PNC 912560 ❑ |
| • Folding shelf, 300x900mm | PNC 912581 ❑ |
| • Folding shelf, 400x900mm | PNC 912582 ❑ |
| • Fixed side shelf, 200x900mm | PNC 912589 ❑ |
| • Fixed side shelf, 300x900mm | PNC 912590 ❑ |
| • Fixed side shelf, 400x900mm | PNC 912591 ❑ |
| • Connecting rail kit for appliances with backsplash: modular 90 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) | PNC 912981 ❑ |
| • Connecting rail kit for appliances with backsplash: modular 90 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) | PNC 912982 ❑ |
| • Back panel, 1200x700mm, for units with backsplash | PNC 913017 ❑ |
| • Back panel, 1200x800mm, for units with backsplash | PNC 913030 ❑ |
| • Endrail kit, flush-fitting, with backsplash, left | PNC 913117 ❑ |
| • Endrail kit, flush-fitting, with backsplash, right | PNC 913118 ❑ |
| • Endrail kit (12.5mm) for thermaline 90 units with backsplash, left | PNC 913208 ❑ |
| • Endrail kit (12.5mm) for thermaline 90 units with backsplash, right | PNC 913209 ❑ |

Electrolux

Modular Cooking Range Line
thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

- U-clamping rail for back-to-back installations with backsplash — PNC 913226 ❑
- Insert profile d=900 — PNC 913232 ❑



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

# Modular Cooking Range Line thermaline 90 - 1200 mm Closed Work top, 1 Side with Backsplash

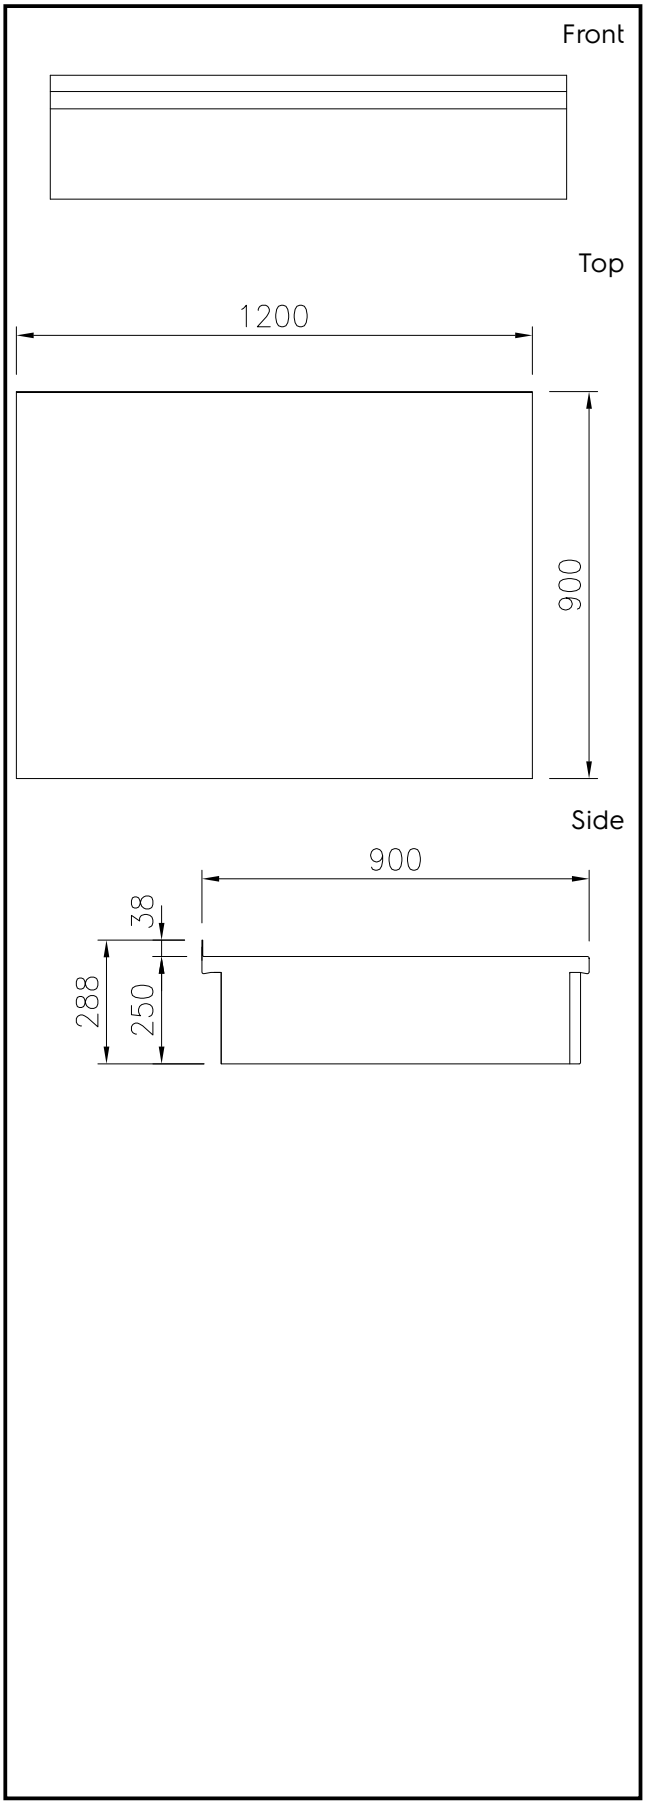


## Key Information:

| | |
|---|---|
| **External dimensions, Height:** | |
| **589171 (MCNABBKOOO)** | 250 mm |
| **External dimensions, Width:** | 1200 mm |
| **External dimensions, Depth:** | 900 mm |
| **Net weight:** | 40 kg |



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.04.04