



Electrolux

ecostore 2 Door Digital Refrigerator, 1430lt (-2 +10)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



ecostore

2 Door Digital Refrigerator, 1430lt (-2 +10)

727282 (REX142FR) Eco Store Refrigerator - 1430
lt 2 Door (-2/+10)- 230
V/1N/50Hz

727424 (REX142FR60) Eco Store Refrigerator - 1430
lt 2 Door (-2/+10)- 220
V/1N/60Hz

Short Form Specification

Item No. _____

Two full doors refrigerator with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. Door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit. Supplied with n. 6x2/1GN Rilsan coated grids and n. 6 sets of 2 stainless steel grid runners. Certified as Class 6 by CECED Italia energy classification.

Main Features

- Two full doors.
- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Performance guaranteed at ambient temperatures of +43°C.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption.
- Cleaning-free condenser: the structure of the wire frame condenser prevents dust and grease accumulation thus avoiding periodical cleaning operations and reducing energy consumption.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Cabinets certified as class 6 by the CECED Italia energy classification board. CECED Italia studies demonstrate that the potential annual savings estimated by replacing a cabinet in class 1 with a cabinet in class 6 of equivalent volume, is equal to 320 € for each refrigerator replaced (considering an energy cost of 0,17 €/kWh and an average net volume of 600lt). See more at: www.ceceditalia.it (only for 727282)

Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Interior base with corners, pressed from a single sheet.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for maintenance.
- Lockable door.
- Door switch stops the fan when door is opened to

APPROVAL: _____



Electrolux

ecostore
2 Door Digital Refrigerator, 1430lt (-2 +10)

avoid cold air exiting the cell, thus saving energy.

- Refrigerant type: R134a.
- CFC and HCFC-free insulation.
- Doors are self-closing and can be fully opened up to 180°.
- Mounted on adjustable Stainless steel feet, with castors as an option.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.


Included Accessories

- 6 of 2/1GN grey rilsan grid with 2 runners PNC 881020


Optional Accessories

- 2 stainless steel runners for refrigerated cabinets - (Marine) PNC 880242
- Set of 8 GN1/1 PVC containers for fish (only for 727282) PNC 880243
- Spacer for 670 lt and 1430 lt refrigerated cabinets PNC 880248
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- Kit 20 pair runners and trays to fit pastry trays (400x600mm) PNC 880333
- Kit of 6 swivelling wheels, 2 with brake, diam 50 mm PNC 880340
- 1/1GN plastic container with false bottom PNC 880705
- 4 swivelling wheels (2 with brake) for refrigerators, diam 125 mm, NOT for Glass Door and remote models PNC 881002
- 2/1GN grey rilsan grid PNC 881004
- 2/1GN aisi 304 stainless steel grid PNC 881016
- 2/1GN 304 AISI stainless steel grid with 2 runners PNC 881018
- Meat rail for 670/1430lt refrigerators with 4 hooks PNC 881019
- 2/1GN grey rilsan grid with 2 runners PNC 881020
- Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers PNC 881021
- Pedal opening for 1430lt refrigerator PNC 881033
- 2/1GN pvc container with lid and 2 runners PNC 881039
- 2/1GN perforated shelf PNC 881042
- 1/1GN rilsan steel wire basket h=150mm PNC 881043
- 3 grey rilsan central grids for 1430lt (not for glass door) PNC 881044
- 2/1GN grey rilsan basket+2 runners h=150mm PNC 881047
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457


Front

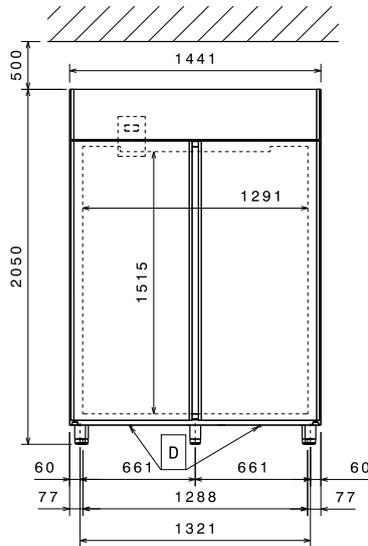

Top



Side

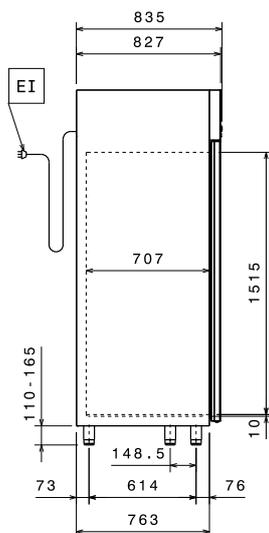

EI = Electrical connection
 RI = Refrigerant Inlet
 RO = Refrigerant Outlet

Electric

Supply voltage:

727282 (REX142FR)	230 V/1 ph/50 Hz
727424 (REX142FR60)	220 V/1 ph/60 Hz

Electrical power:

727282 (REX142FR)	0.33 kW
727424 (REX142FR60)	0.318 kW

Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Height:	2050 mm
External dimensions, Width:	1441 mm
External dimensions, Depth:	837 mm
External dimensions, Depth with Doors Open:	1430 mm
Number and type of doors:	2Full
Gross capacity:	1430 lt
Number and type of grids (included):	6 - GN 2/1
Type of external material:	304 AISI
Type of internal material:	304 AISI
Internal panels material:	304 AISI
Number of positions & pitch:	
727282 (REX142FR)	44; 30 mm
727424 (REX142FR60)	44; 33 mm
CECED Energy Classification:	
727282 (REX142FR)	Class 6

Refrigeration Data

Control type:	Digital
Refrigerant type:	R134a
Refrigeration power:	
727282 (REX142FR)	398 W
727424 (REX142FR60)	417 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	170 g
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated