



Electrolux

Meal Distribution System Heated Plate Lowerator Trolley - 2 Cylindrical Plate 310mm

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Meal Distribution System

Heated Plate Lowerator Trolley - 2 Cylindrical Plate 310mm

344110 (MDLOPC07H)

2 cylinders plate (d.=310mm)
lowerator trolley, heated
type

Short Form Specification

Item No. _____

Structure, panels, top, and handle in 304 AISI stainless steel. 4 swivelling antitrack wheels 125mm diam., two with brakes. 4 integrated bumpers. Ergonomic handle on the top of the trolley. Coiled electric cable with internal cable clamp and hook. Adjustable automatic lift mechanism using springs and runners. Convection heating with fan and armoured elements. Thermostatic temperature regulation from 30° to 90°C. Control panel with 2 indicator lamps for power and heating element activity. Double walled structure and insulated panels. Completely removable electrical box to allow the trolley to be washed safely. The two cylinders can accommodate plates (n.100 dia.mm310). IPX5 water resistant.

Main Features

- Two cylinders with adjustable automatic lift mechanism, accomodates 100 plates (diameter 310 mm).
- Convection heating with fan and armoured elements.
- Thermostatic temperature regulation from 30 ° C to 90 ° C.
- Two indicator lamps on control panel for power and heating element activity.
- Electrical box can be completely removed for safer cleaning.
- Extendable coiled electric cable with internal cable clamp and hook.
- Equipped with 4 rubber bumpers and 4 swivelling wheels, 2 of which with breaks.

Construction

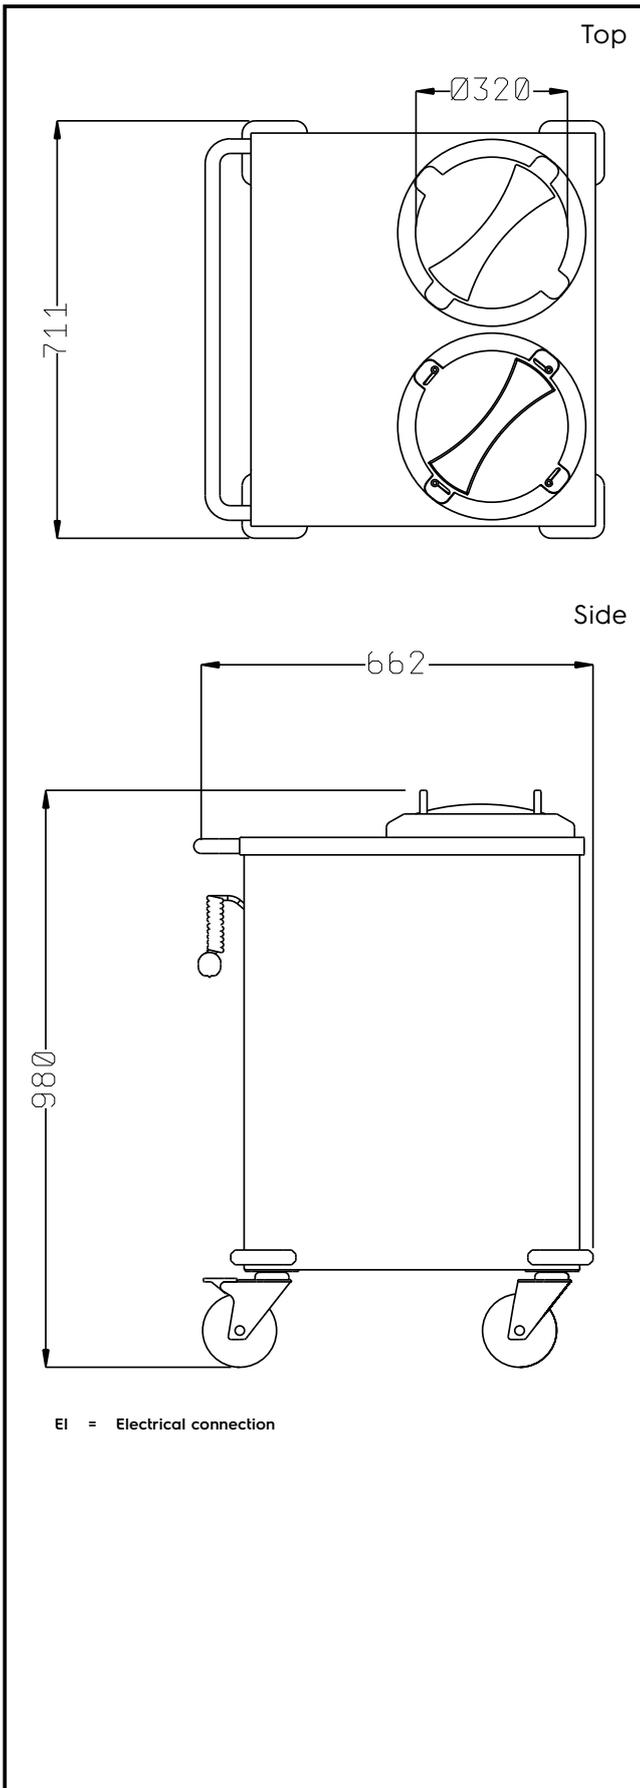
- Double walled structure, insulated panels, top and handle in AISI 304 stainless steel with Scotch Brite finish.

APPROVAL: _____



Electrolux

Meal Distribution System
Heated Plate Lowerator Trolley - 2 Cylindrical Plate 310mm


Electric
Supply voltage:

344110 (MDLOPC07H)

230 V/1N ph/50/60 Hz

Key Information:
External dimensions, Height: 980 mm

External dimensions, Width: 712 mm

External dimensions, Depth: 811 mm

Net weight: 65 kg